


Accura® ClearVue™ Free (SL 7870)

High clarity plastic for a multitude of applications

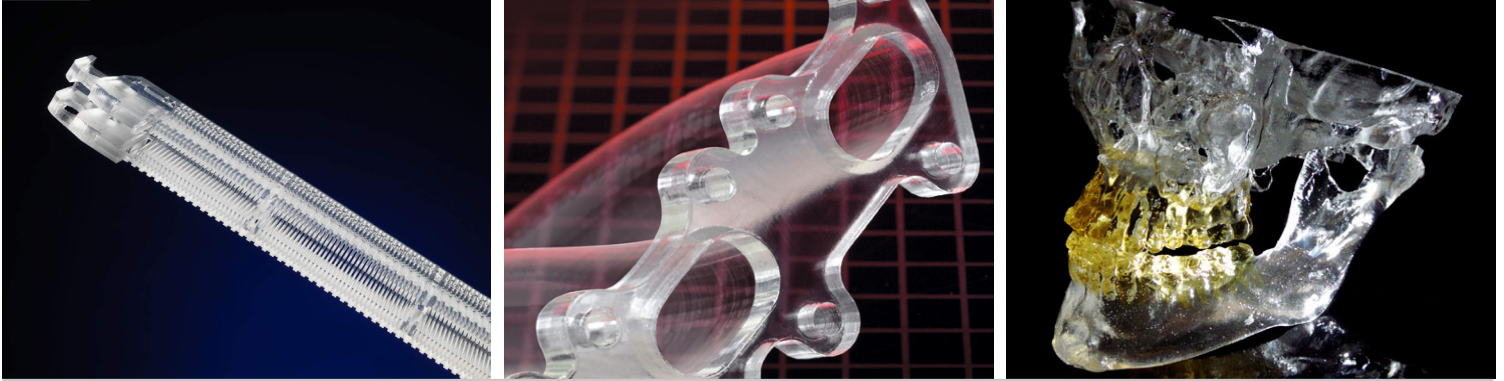

Technical Data


Post-Cured Material			
Measurement	Condition	Metric	U.S.
Tensile Strength (MPa/PSI)	ASTM D 638	38-42	5470-6050
Tensile Modulus (MPa/KSI)	ASTM D 638	1940-2250	281-326
Elongation at Break	ASTM D 638	10-22 %	10-22 %
Flexural Strength (MPa/PSI)	ASTM D 790	73-76	10585-11020
Flexural Modulus (MPa/KSI)	ASTM D 790	1940-2250	281-326
Impact Strength (J/m /Ft-lbs/in)	ASTM D 256	23-51	0.43-0.96
Heat Deflection Temperature	ASTM D 648 @ 66 PSI @ 264 PSI	48 °C	118 °F
		41 °C	106 °F
Coefficient of Thermal Expansion (CTE)	ASTM E 831-93 25-50 °C 50-100 °C	97 µ mm/m °C	54 µin/in °F
		216 µ mm/m °C	120 µin/in °F
Glass Transition (Tg)	DMA, E''	56 °C	133 °F
Shore D		86	86

Liquid Material

Measurement	Condition	Value
Viscosity	@ 30 °C (86 °F)	180 cps
Penetration Depth (Dp)		7.2 mils
Critical Exposure (Ec)		10.6 mJ/cm ²
Color		Clear
Solid Density	@ 25 °C (77 °F)	1.15 g/cm ³
Liquid Density	@ 28 °C (82 °F)	1.13 g/cm ³

Features

- Clear and transparent
- Rigid and tough
- Great for headlamps, bottles and transparent assemblies
- Excellent humidity/moisture resistance



3DSYSTEMS®

3D Systems Corporation Tel: +1 803.326.3900
333 Three D Systems Circle NYSE: DDD
Rock Hill, SC 29730, USA www.3dsystems.com

MANUFACTURING THE FUTURE

Warranty/Disclaimer: The performance characteristics of these products may vary according to product application, operating conditions, or with end use. 3D Systems makes no warranties of any type, express or implied, including, but not limited to, the warranties of merchantability or fitness for a particular use.